



- TASTE THE DIFFERENCE -

## MODEL 44RMTFB

This pressurized, 9 flavor soft serve machine delivers valuable menu flexibility in a small footprint. By fully incorporating the flavor in every bite of soft serve, this freezer produces the highest quality, most consistent and profitable product you can serve. Simply press a button to select flavors! The easy-to-operate features include: easy syrup adjustments, one button flavor selection and no complicated attachments. This machine is perfect for high volume establishments wanting to serve superior-quality, smooth and creamy ice cream, frozen yogurt or gelato. Great for co-branding concepts as well as college cafeterias, buffets and adding additional flavors to any shops.

### The Electro Freeze Advantage



- **9 Flavors To Choose From** contained in 32oz. syrup containers located in the cabinet. Dispense the base product alone or press a button to infuse the product with one of 8 additional flavors.
- **The Finest Frozen Product**, consistently the best frozen product available. Smooth, creamy and profitable
- **Product Flexibility** serves a variety of frozen products, custard, ice cream sorbets, water ice or yogurt
- **Flexible Mix Holding System** pumps directly from bags or from mix containers
- **Patented Mix Transfer System\*** simplest and most reliable pressurized system available
- **Self Closing Spigots** prevents the mess and eliminates waste
- **Exclusive Auger Design** gently blends, reducing agitation, maintaining product quality and consistency.
- **Energy Conservation Mode** reduces energy cost and holds product safely during non-business hours
- **Superior Low Temperature Refrigeration System** provides the best in class production and product quality
- **Experience Tells** Electro Freeze has been manufacturing quality frozen treat machines since 1929.

## PRESSURIZED SOFT SERVE FREEZER 9 Flavor Fuzionate



\* Shown with optional trimstrip decal HC164238.

**44RMTFB Fuzionate™ Freezer**

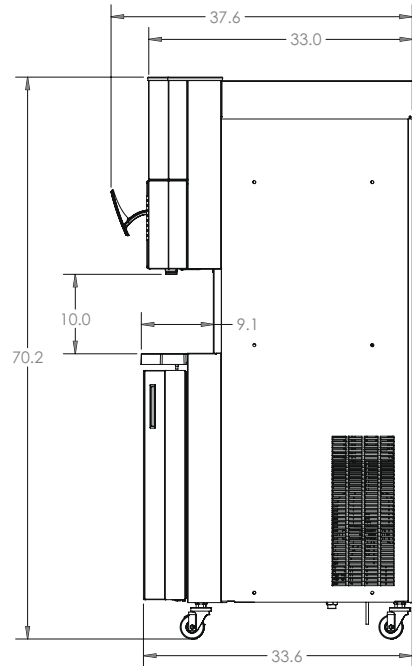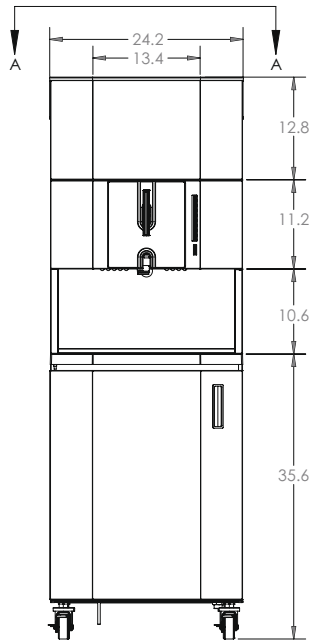

**Model 44RMTFB Specifications**

Due to continual product improvements all specifications are subject to change without notice.

<b>Weights</b>	<b>lbs.</b>	<b>kgs.</b>	
Net	652	296	
Crated	704	320	
	<b>cu.ft.</b>	<b>cu.m.</b>	
Volume	58.42	1.65	
<b>Dimensions</b>	<b>in.</b>	<b>cm</b>	
Width	24.2	61.5	
Depth	33	83.8	
Height	70.2	178.3	
<b>Electrical</b>	<b>Maximum Fuse Size</b>	<b>Minimum Circuit Ampacity</b>	<b>Poles (P) Wires (W)</b>
208-230/60/3 Air	20	20	3P, 3W
208-230/60/3 Water	20	19	3P, 3W
208-230/60/1 Air	30	27	2P, 2W
208-230/60/1 Water	30	25	2P, 2W
	<b>Total Amps</b>	<b>kW</b>	<b>Poles (P) Wires (W)</b>
380-415/50/3 Air	11.5	4.5	3P, 4W

Electrical characteristics other than above available on request from factory or local distributor. Check nameplate for exact electrical data.

**Bidding Spec**

Electrical: Volt \_\_\_\_\_ Hz \_\_\_\_\_ Ph \_\_\_\_\_  
 Cooling: \_\_\_\_\_ Neutral \_\_\_\_\_ Yes \_\_\_\_\_ No  
 Options: \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_

**Electrical**

One dedicated electrical connection is required. Manufactured to be permanently connected. See electrical chart for the proper requirement. Consult your local electrical codes for cord and receptacle specifications.

**Beater Motor**

One, 2 hp.

**Refrigeration Systems**

One, 6,700 Btuh. R404a.  
 Separate Cabinet Refrigeration, One, 1200 Btuh, R134a.  
 Btuh may vary depending on compressor used.

**Exterior Space Required**

**Water Cooled** - 3" (7.6 cm) air space required on both sides and the rear panel for proper air circulation.  
**Air Cooled** - 6" (15.3 cm) air space required on both sides and the rear panel for proper air circulation.

**Potable Water Connection (For rinse line):** 3/8" FPT  
**Freezing Cylinder Capacity:** one - 3.7 quart (3.5 liters)  
**Syrup Capacity:** eight - 32oz. (.95 liters) syrup bottles

Certified and/or listed by:



\*UL listed and listed by Underwriters Laboratories under Canadian National Standard C22.2 No. 120-M91(R2008)



**Electro Freeze div. of H.C. Duke & Son, LLC**

2116-8th Avenue, East Moline, Illinois 61244 USA  
 Phone (309) 755-4553 • (800) 755-4545  
 FAX (309) 755-9858  
 E-mail: sales@electrofreeze.com • www.electrofreeze.com

**Authorized Distributor**